


CAUTION – RISK OF SHOCK – Disconnect Power at the main circuit breaker panel or main fuse box before starting and during the installation.


- 1) Pass fixture wire thru small threaded pipe. Thread pipe into coupling on top of fixture and tighten to secure.
 - 2) Pass fixture wire thru threaded hole in loop. Thread loop onto small threaded pipe. Tighten to secure.
 - 3) Thread small threaded pipe into end of 2nd loop. Pass threaded pipe on small loop up through hole in canopy. Place lockwasher onto end of threaded pipe protruding from inside canopy. Thread hexnut onto threaded pipe protruding from inside canopy. Tighten to secure loop.
 - 4) Attach one end of chain to loop on top of fixture body. Attach other end of chain to small loop on canopy. Close chain link ends together using chain pliers or padded pliers to prevent damage to finish.
 - 5) Weave fixture wires and ground wire through chain links no more than 3 inches apart.
 - 6) Pass fixture wires through hole in small loop on canopy and through hole in canopy.
 - 7) Find the appropriate threaded holes on mounting strap. Assemble mounting screws into threaded holes.
 - 8) Attach mounting strap to outlet box. Mounting strap can be adjusted to suit position of fixture.
 - 9) Grounding instructions: (See Illus. A or B)
 - A) On fixtures where mounting strap is provided with a hole and two raise dimples. Wrap ground wire from outlet box around green ground screw, and thread into hole.
 - B) On fixtures where a cupped washer is provided. Put ground wire from outlet box under cupped washer and green ground screw and thread screw into hole in mounting strap.
- If fixture is provided with ground wire. Connect fixture ground wire to outlet box ground wire with wire connector, after following the above steps. Never connect ground wire to black or white power supply wires.

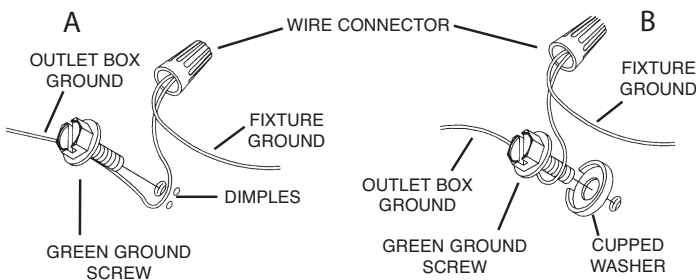

- 10) Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor


*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)



- 11) Push fixture to ceiling, carefully passing mounting screws through holes in canopy. Make sure all wires are inside canopy and do not get pinched between canopy and ceiling.
- 12) Thread lockup knobs onto mounting screws and tighten to secure fixture to ceiling.
- 13) Insert recommended bulbs.
- 14) Thread hexnut onto threaded pipe leaving approximately 3/8-1/2 inch thread showing.
- 15) Using same end of threaded pipe, screw threaded pipe into coupling just below sockets. Make sure threaded pipe does not protrude past opening in coupling.
- 16) Raise glass up to fixture passing threaded pipe thru hole in glass. Slip rubber washer then washer over threaded pipe. Screw hexnut onto end of threaded pipe. Tighten hexnut to secure glass. (DO NOT over tighten.)
- 17) Pass trim over threaded pipe and screw finial onto threaded pipe. (DO NOT over tighten.)

SEMI-FLUSH MOUNT


- 1) Pass fixture wire thru small threaded pipe. Thread pipe into coupling on top of fixture and tighten to secure.
- 2) Pass wire thru small tube. Thread tube onto end of threaded pipe. Tighten to secure.
- 3) Pass wire thru small threaded pipe. Thread pipe into end of tube.
- 4) Pass fixture wire thru hole in canopy. Pass canopy over small threaded pipe. Pass wire thru lockwasher and slip lockwasher over threaded pipe. Pass wire thru hexnut. Thread hexnut onto threaded pipe. Tighten to secure.
- 5) Continue with steps 7 - 18 in Chain Hung Mounting instructions.

 SMALL THREADED PIPE
PEQUEÑO TUBO ROSCADO



 SMALL TUBE
TUBO PEQUEÑO



 SMALL THREADED PIPE
PEQUEÑO TUBO ROSCADO

